




FML ske Manufacturing Co., Ltd

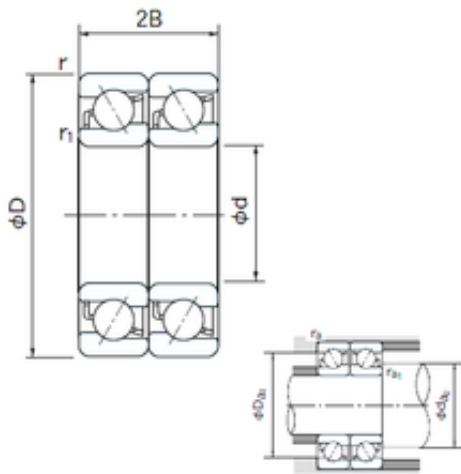

70 mm x 125 mm x 24 mm NACHI 7214CDT
angular contact ball bearings

Bearing No. 7214CDT

7214CDT Bearing 2D drawings and 3D CAD models

Size	70x125x24 mm
Bore Diameter	70 mm
Outer Diameter	125 mm
Width	24 mm
d	70 mm
D	125 mm
B	24 mm
C	24 mm
Angle (°)	15 °
a -	0.7 mm
r min.	1.5 mm
r1 min.	1 mm
2B	48 mm
da min.	79 mm
Da max.	119.6 mm
ra max.	1 mm
Weight	1.12 Kg
Basic dynamic load rating (C)	130 kN
Basic static load rating (C0)	130 kN
(Grease) Lubrication Speed	6600 r/min
Bore Type	Cylindrical Bore
Enclosure	Open
Configuration	Duplex
Bore Size	70 mm
Outside Diameter	125 mm



FML ske Manufacturing Co., Ltd

Width	24 mm
Fillet Radius/Chamfer	1.5 mm
r1	1 mm
Dynamic Load Rating	130,000 N
Static Load Rating	130,000 N
Limiting Speed - Grease	6,600 rpm
Limiting Speed - Oil	8,800 rpm
da1 (min)	79 mm
da2 (min)	79 mm
Da1 (max)	116 mm
Da2 (max)	119.6 mm
ra (max)	1.5 mm
ra1 (max)	1 mm